



CLiMATUBE® easy

Sustainable insulation concept

Product properties

- Polyethylene pipe insulation based on recycled raw materials
- Scope of application: heating and hot water pipes
- Excellent insulating properties: thermal conductivity of 0.040 W/mK at 40 °C mean temperature
- Heating energy losses reduced by up to 80 %
- Fire class: E (normal flammability)
- Suitable for pipe temperatures from 0 °C to +100 °C




NMC (uk) Ltd.

Tafarnaubach Industrial Estate · UK - NP22 3AA Tredegar, South Wales

Phone: +44 1495 713266

Email: enquiries@nmc-uk.com

www.nmc-climatube.com

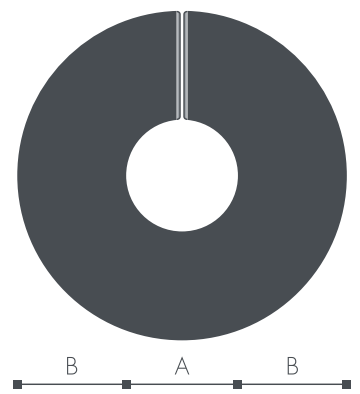

Product range

Type	A mm	B mm	Length	Quantity
15 - 13	15 +1/+4	13 ±2	1 m	100m
18 - 13	18 +1/+4	13 ±2	1 m	87m
22 - 13	22 +1/+4	13 ±2	1 m	80m
28 - 13	28 +1/+4	13 ±2	1 m	62m
35 - 13	35 +1/+4	13 ±2	1 m	52m
42 - 13	42 +2/+6	13 ±2	1 m	38m
15 - 25	15 +1/+4	25 ±2,5	1 m	24m
18 - 25	18 +1/+4	25 ±2,5	1 m	20m
22 - 25	22 +1/+4	25 ±2,5	1 m	20m
28 - 25	28 +1/+4	25 ±2,5	1 m	16m

Elbows

Type	A mm	B mm	Quantity pcs
15 - 13	15 +1/+4	13 ±2	40
18 - 13	18 +1/+4	13 ±2	40
22 - 13	22 +1/+4	13 ±2	32
28 - 13	28 +1/+4	13 ±2	26
35 - 13	35 +1/+4	13 ±2	23
42 - 13	42 +2/+6	13 ±2	19
15 - 25	15 +1/+4	25 ±2,5	21
18 - 25	18 +1/+4	25 ±2,5	18
22 - 25	22 +1/+4	25 ±2,5	18
28 - 25	28 +1/+4	25 ±2,5	16

T-pieces

Type	A mm	B mm	Quantity pcs
15 - 13	15 +1/+4	13 ±2	40
18 - 13	18 +1/+4	13 ±2	40
22 - 13	22 +1/+4	13 ±2	32
28 - 13	28 +1/+4	13 ±2	21